


Accessories
Dust collection wheel guard

A: for offset diamond wheel
B: for diamond wheel

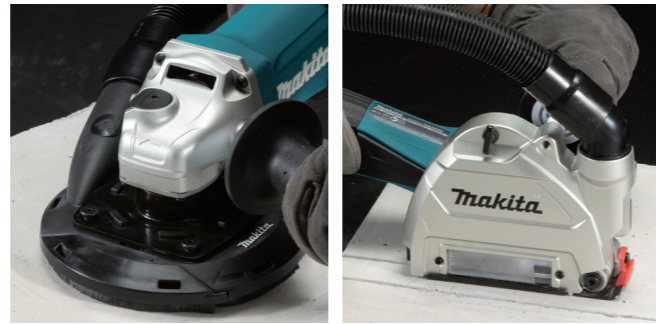

Part No.	Size	Type
*191F81-2	125mm	A
*191G06-2	125mm	B

*Cannot be installed undetachable wheel cover models

Cutting wheel cover attachment for cutting work

Can be attached to the wheel cover for grinding with easy assembling.

Part No.	Size
199709-0	115mm
199710-5	125mm



Wheel cover for cut-off wheel

Part No.	Size
*162555-4	100mm
*162556-2	115mm
*162557-0	125mm



Vibration proof grip set

Part No. 194514-0



Dust cover attachment set

Part No. 199514-5



Angle Grinder Paddle Switch Trigger series



Photo: GA5050

Powerful 1,300 W Motor with Paddle Switch Trigger



Photo: GA5052

Angle Grinder Paddle Switch Trigger series

	GA4050	GA4550/ GA4552	GA5050/ GA5052
Double Insulation	GA4050R	GA4550R/ GA4552R	GA5050R/ GA5052R
Soft Start (GA4050R, GA4051R, GA4550R, GA4551R, GA4552R, GA4553R, GA5050R, GA5051R, GA5052R, GA5053R)	GA4051R	GA4551R/ GA4553R	GA5051R/ GA5053R
Dust Collection (GA4050/R, GA4550/R, GA5050/R, GA4552/R, GA5052/R)	GA4051R	GA4551R, GA4553R	GA5051R, GA5053R
Anti-restart function model	GA4050R	GA4550R/ GA4552R	GA5050R/ GA5052R
Anti-restart function model Undetachable wheel cover model	GA4051R	GA4551R/ GA4553R	GA5051R/ GA5053R
Continuous rating input	1,300W	1,300W	1,300W
Wheel Diameter	100 mm (4")	115 mm (4-1/2")	125 mm (5")
No Load Speed (RPM)	11,000	11,000	11,000
Vibration Level (Normal side grip)	Surface Grinding: 6.5 m/s ² Disc Sanding: 2.5 m/s ² or less	Surface Grinding: 7.0 m/s ² Disc Sanding: 2.5 m/s ²	Surface Grinding: 7.5 m/s ² Disc Sanding: 2.5 m/s ² or less
Sound Pressure Level	91 dB(A)	91 dB(A)	91 dB(A)
Sound Power Level	102 dB(A)	102 dB(A)	102 dB(A)
Dimensions (L x W x H)	325x117x110 mm (12-3/4"x4-5/8"x4-5/16")	325x130x117 mm (12-3/4"x5-1/8"x4-5/8")	325x140x117 mm (12-3/4"x5-1/2"x4-5/8")
Net weight	GA4050/R: 2.3-2.6 kg (5.1-5.7 lbs.) GA4051R: 2.3-2.5 kg (5.1-5.5 lbs.)	GA4550/R, GA4552/R: 2.4-2.8 kg (5.3-6.2 lbs.) GA4551R, GA4553R: 2.5-2.7 kg (5.5-6.0 lbs.)	GA5050/R, GA5052/R: 2.5-2.8 kg (5.5-6.2 lbs.) GA5051R, GA5053R: 2.5-2.7 kg (5.5-6.0 lbs.)
Power supply cord	2.5 m (8.2 ft.)	2.5 m (8.2 ft.)	2.5 m (8.2 ft.)

Standard Equipment:
Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202009



Angle of side grip to gear housing: 110°

100mm	115mm	125mm	
GA4050	GA4550	GA5050	
GA4050R	GA4550R	GA5050R	Soft start/ Anti-restart function
GA4051R	GA4551R	GA5051R	Undetachable wheel cover Soft start/ Anti-restart function




Angle of side grip to gear housing: 90°

115mm	125mm	
GA4552	GA5052	
GA4552R	GA5052R	Soft start/ Anti-restart function
GA4553R	GA5053R	Undetachable wheel cover Soft start/ Anti-restart function

Easy-to-operate large paddle switch trigger
works properly wherever the user holds the barrel grip.



High durability
cutting and grinding, due to longer service life of motor, carbon brushes, etc.




Enhanced shaft locking mechanism

- Gear housing is redesigned to prevent breakage of the shaft locking mechanism.
- Large size lock pin cap allows for normal shaft locking operation even with a thick-gloved finger.



Machined bevel gears


Toolless wheel cover (Slide lever style)
allows for fast and easy angle adjustment and installation/removal of wheel cover.

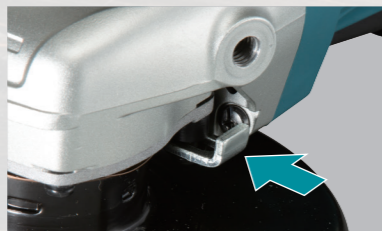

Angle of side grip to gear housing



GA4050/ GA4550,
GA5050
GA4050R/ GA4550R/
GA5050R
GA4051R/ GA4551R/
GA5051R

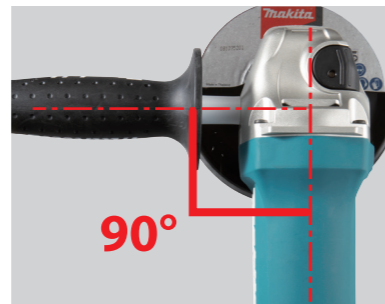

GA4552/ GA5052
GA4552R/ GA5052R
GA4553R/ GA5053R



Anti-drop holders
allows to attach anti-drop strap, etc.



Easy-to-hold barrel grip
provides less hand fatigue and more control of the machine due to:

- Grip circumference smaller than 9564P series
- Ergonomic design



With soft start
GA4050R/ GA4051R/ GA4550R/ GA4552R/ GA4551R/ GA4553R/ GA5050R/
GA5052R/ GA5051R/ GA5053R
minimizes start-up shock and makes the tool start smoothly

With anti-restart function
GA4050R/ GA4051R/ GA4550R/ GA4552R/ GA4551R/ GA4553R/ GA5050R/
GA5052R/ GA5051R/ GA5053R
Minimizes accidental start-up even if the tool is plugged to power source with the switch "ON".

Undetachable wheel cover
GA4051R/ GA4551R/ GA5051R/ GA4553R/ GA5053R
designed not to be easily detached by user
(for construction workers, metal workers, etc.)

Photo: GA5050

Model No.	Wheel size			Angle of side grip to gear housing	Soft start	Anti-restart function	Undetachable wheel cover
	100mm	115mm	125mm				
GA4050	GA4550	GA5050	110°	-	-	-	
GA4050R	GA4550R	GA5050R		•	•	-	
GA4051R	GA4551R	GA5051R		•	•	•	
-	GA4552	GA5052	90°	-	-	-	
-	GA4552R	GA5052R		•	•	-	
-	GA4553R	GA5053R		•	•	•	