



**Cordless Angle Impact Driver TL064D**  
**Cordless Angle Impact Wrench TL065D**

↑  
**53mm**  
↓

↔  
**18mm**


**Angle Impact Driver**  
**TL064D**



# Ultra-Compact Angle Head

Ideal for Fastening in Tight Spots

**Angle Impact Wrench**  
**TL065D**

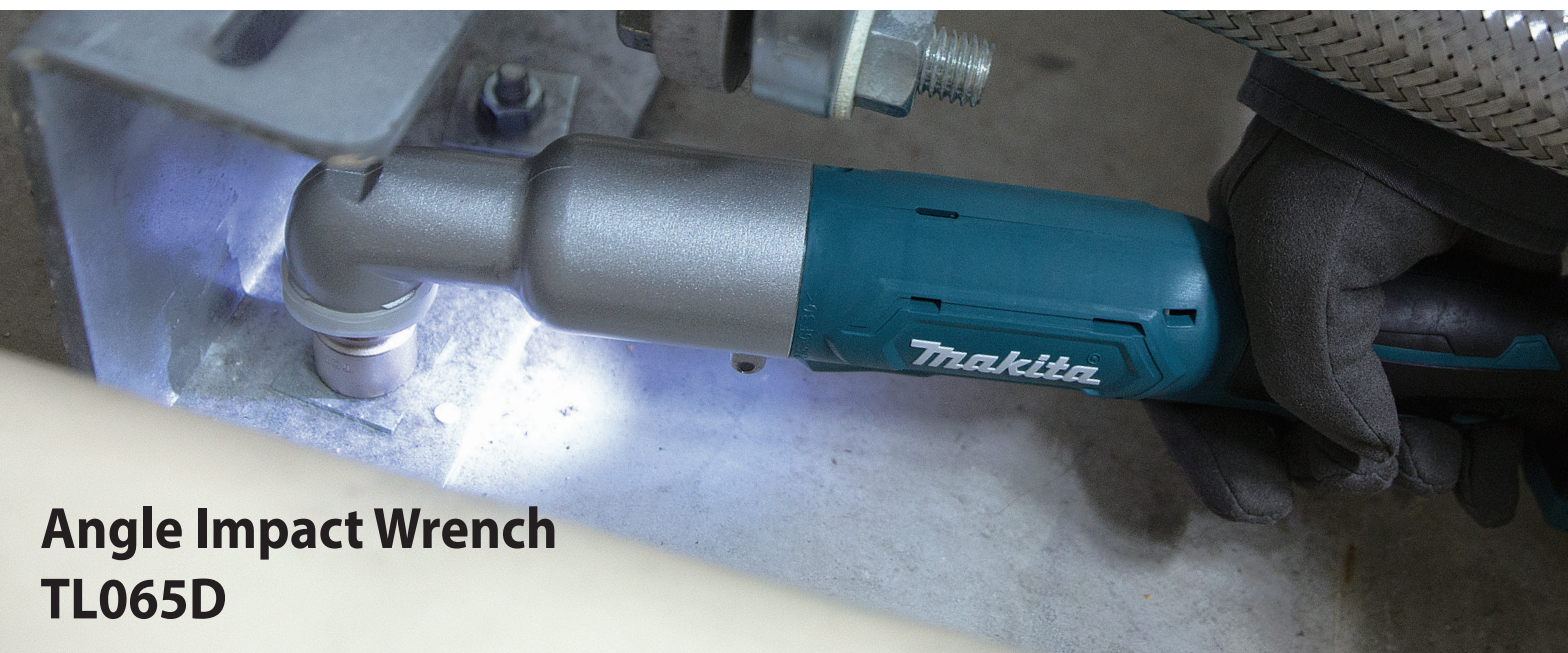

Powered by Slide Li-ion Battery of Makita's New 12V max Platform



# Compact & Slim for Easy Handling

- Head height  
**53 mm**
- Center height  
**18 mm**
- Max fastening torque  
**60 N·m**
- Lightweight  
**1.3 kg**  
(2.8lbs.)  
w/BL1016



Photo : TL064D

Phosphorescent bumper

Belt clip


Single LED job light with preglow/ afterglow functions



Li-ion Battery & Charging Time Reference, Compatibility Chart

	DC10SB	DC10WD
*with Battery fuel gauge		
<b>BL1016</b> 1.5Ah	<b>22 min</b>	<b>50 min</b>
*BL1021B 2.0Ah	<b>30 min</b>	<b>70 min</b>
*BL1041B 4.0Ah	<b>60 min</b>	<b>130 min</b>

For fastening and loosening in tight spaces



Angle wrench head



Ergonomically designed handle with sure grip



## Accessories

Optional attachments for versatility



**Angle head**  
Part No. 135183-8  
(For C-form bit)  
Part No. 135200-4




**Angle wrench head**  
9.5mm (3/8") square drive  
Part No. 135201-2



**Straight head**  
Part No. 192440-7  
(For E-form bit)  
Part No. 192486-3



**Ratchet head**  
Part No. 192439-2



**Socket adapter**  
Use with Ratchet head  
9.5mm (3/8") square drive  
Part No. 134745-9  
12.7mm (1/2") square drive  
Part No. 134746-7



**Socket**  
Use with Ratchet head  
Size: 17x 31  
Part No. 134743-3  
Size: 19x 33  
Part No. 134744-1



**Cordless Angle Impact Driver TL064D**

**Cordless Angle Impact Wrench TL065D**

- Variable Speed
- Brake
- Reversing
- Built-in Job Light
- Carrying Case

**Standard Equipment:**  
Phillips Bit, Belt Clip, Battery, Charger

- Variable Speed
- Brake
- Reversing
- Built-in Job Light
- Carrying Case

**Standard Equipment:**  
Belt Clip, Battery, Charger

	TL064D
<b>Capacity</b>	Machine Screw : M4 - M8 (5/32" - 5/16") Standard Bolt : M4 - M12 (5/32" - 1/2") High Tensile Bolt : M4 - M8 (5/32" - 5/16") Coarse thread (in length) : 22 - 75mm (7/8" - 2-31/32")
<b>Hex Shank</b>	6.35 mm (1/4")
<b>No Load Speed (RPM)</b>	0 - 2,000
<b>Impacts Per Minute (IPM)</b>	0 - 3,000
<b>Max Fastening Torque</b>	60 N·m (530 in.lbs.)
<b>Vibration Level</b>	Impact tightening of fasteners of the maximum capacity of the tool: 15.0 m/s <sup>2</sup>
<b>Sound Pressure Level</b>	91 dB(A)
<b>Sound Power Level</b>	102 dB(A)
<b>Dimensions(L x W x H)</b>	361x66x86mm (14-1/4"x2-5/8"x3-3/8")
<b>Net weight</b>	1.3kg (2.8lbs.) - 1.6kg (3.6lbs.)

	TL065D
<b>Capacity</b>	Standard Bolt : M4 - M12 (5/32" - 1/2") High Tensile Bolt : M4 - M8 (5/32" - 5/16")
<b>Square Drive</b>	9.5 mm (3/8")
<b>No Load Speed (RPM)</b>	0 - 2,000
<b>Impacts Per Minute (IPM)</b>	0 - 3,000
<b>Max Fastening Torque</b>	60 N·m (530 in.lbs.)
<b>Vibration Level</b>	Impact tightening of fasteners of the maximum capacity of the tool: 18.0 m/s <sup>2</sup>
<b>Sound Pressure Level</b>	90 dB(A)
<b>Sound Power Level</b>	101 dB(A)
<b>Dimensions(L x W x H)</b>	361x66x86mm (14-1/4"x2-5/8"x3-3/8")
<b>Net weight</b>	1.3kg (2.8lbs.) - 1.6kg (3.6lbs.)

*Items of standard equipment and specifications may vary by country or area. The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.*

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201705