

Dust extraction system

Compatible with long bits
Dust collection is available for bits with an overall length of up to 265mm.

Depth gauge for increased drilling consistency

Equipped with HEPA Filter
which removes particles with an efficiency rating of 99.75% from the air passing through.

HEPA filter

Filter cleaning mechanism
by turning the dial, the dust falls off from the filter

Transparent dust case
for easy checking of collected dust amount

Easy disposal of dust and easy cleaning of dust case
thanks to:
• Dust case cover easy to open / close with a single operation of a locking tab
• Wide opening of dust case

Dust case body is equipped with a fan for dust collection.

Accessories

Dust case set
for DX11 / DX10
Part No. 191F49-8

Dust cup set
for HR3011FC / HR3001C
Part No. 195173-3
for HR3012FC
Part No. 195179-1

Dust cup
Part No. 421342-3
Bit dia: 14.5mm
Part No. 421664-1
Bit dia: 12-16mm

Drill chuck set
for HR3012FC
Part No. 191F46-4

Tool holder set
for HR3012FC
Part No. 191F47-2

Spacer set
for HR3011FC / HR3001C
Part No. 191L91-5

Combination Hammer

HR3012FC / HR3011FC / HR3001C 30 mm (1-3/16") Adapted for SDS-PLUS bits

	HR3012FC	HR3011FC	HR3001C
Double Insulation	1,050W	1,050W	1,050W
Variable Speed	EPTA-Procedure 05/2009: 3.9 J	EPTA-Procedure 05/2009: 3.9 J	EPTA-Procedure 05/2009: 3.9 J
Reversing	Concrete (w/ TCT Bit): 30 mm (1-3/16")	Concrete (w/ TCT Bit): 30 mm (1-3/16")	Concrete (w/ TCT Bit): 30 mm (1-3/16")
Constant Speed	Concrete (w/ Diamond Core Bit): 80 mm (3-1/8")	Concrete (w/ Diamond Core Bit): 80 mm (3-1/8")	Concrete (w/ Diamond Core Bit): 80 mm (3-1/8")
Adapted for SDS-PLUS bits	Steel: 13 mm (1/2") / Wood: 32 mm (1-1/4")	Steel: 13 mm (1/2") / Wood: 32 mm (1-1/4")	Steel: 13 mm (1/2") / Wood: 32 mm (1-1/4")
Torque Limiter	1.5 - 13 mm (1/16 - 1/2")	-	-
Dust Collection	0 - 4,500	0 - 4,500	0 - 4,500
Built-in Job Light (HR3012FC/HR3011FC)	0 - 840	0 - 840	0 - 840
Carrying Case	93 dB(A)	94 dB(A)	94 dB(A)
	104 dB(A)	105 dB(A)	105 dB(A)
	Chiselling Function w/ Side Grip: 5.5 m/s ²	Chiselling Function w/ Side Grip: 6.0 m/s ²	Chiselling Function w/ Side Grip: 11.0 m/s ²
	Hammer Drilling into Concrete: 9.5 m/s ²	Hammer Drilling into Concrete: 9.5 m/s ²	Hammer Drilling into Concrete: 13.5 m/s ²
	Drilling into Metal: 6.0 m/s ²	Drilling into Metal: 5.5 m/s ²	Drilling into Metal: 6.0 m/s ²
	Dimensions (L x W x H)	386 x 98 x 242 mm (15-1/4 x 3-7/8 x 9-1/2")	369 x 98 x 242 mm (14-1/2 x 3-7/8 x 9-1/2")
	Net weight	4.5 - 4.7 kg (9.9 - 10.4 lbs.)	4.4 - 4.8 kg (9.7 - 10.6 lbs.)
	Power supply cord	4.0 m (13.1 ft)	4.0 m (13.1 ft)

Standard Equipment: Quick Change Drill Chuck (HR3012FC only), Depth Gauge, Side Grip

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.



Combination Hammer HR3012FC / HR3011FC / HR3001C

30 mm (1-3/16") Adapted for SDS-PLUS bits

High Power & Low Vibration

Vibration level
9.5 m/s²
mode: Hammer Drilling
model: HR3012FC / HR3011FC

with Dust extraction system
(HR3012FC / HR3011FC only)

HR3012FC

Quick change drill chuck



DX11

HEPA filter

AVT
ANTI VIBRATION TECHNOLOGY

HR3011FC



DX10

HEPA filter

AVT
ANTI VIBRATION TECHNOLOGY

HR3001C



Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202012

Excellent Drilling Efficiency

Superior drilling efficiency

The impact energy is drastically increased from that of Predecessor model by redesigned hammering mechanism.

Less bit wobbling

achieved by making bit guide portion 8mm longer than that of Predecessor model


Dust extraction system



HEPA filter

Work speed

- Drilled holes to a depth of 60mm (2-3/8")
- Concrete with compressive strength of 40N/mm² / diameter: ø16.0mm (5/8")

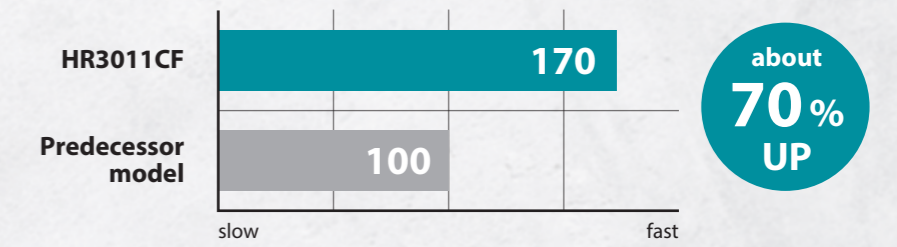


A 50m cable reel was used as extension power supply cord.

AVT Anti Vibration Technology

HR3012FC / HR3011FC

HR3011FC and HR3012FC are equipped with the following two different counterweights:

- Counterweight to cancel the back-and-forth vibration caused by hammering
- Counterweight to cancel the vibration caused by imbalanced rotation of crankshaft

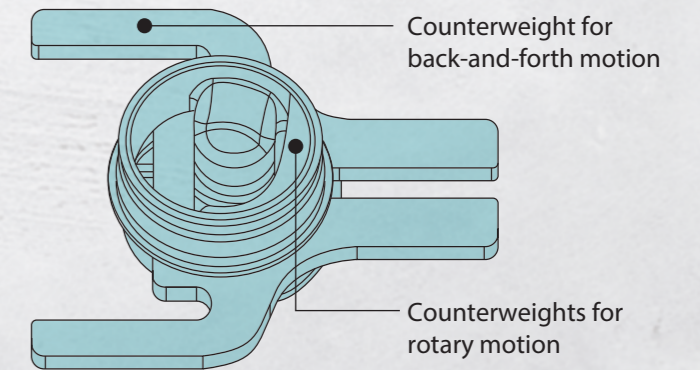

Anti-vibration side grip HR3012FC / HR3011FC absorbs excess vibration beyond the canceling capacity of the two counterweights.

Reversing switch lever



LED job light

(HR3011FC, HR3012FC only)




3 mode

Hammering with Rotation

Rotation

Hammering



Anti-vibration rear handle

Vibration absorbing performance is increased by two cushion rings added to connecting parts.