



**Angle Grinder**  
**GA7030/ S, GA7040/ S 180mm (7")**  
**GA9030/ S, GA9040/ S 230mm (9")**

Satisfy Professional's Needs

# Outstanding Durability



## Option

**Anti Vibration AVT Grip** Part No. 194290-6



**Loop Handle**  
Part No. 192619-0



**Plastic carrying case**  
Part No. 824755-1






**Dust Collecting Wheel Guard** Part No. 194044-1



**Dust Covers** Part No. 194289-1  
Protect motor from metal dust.



## Angle Grinder GA7030/ S/ GA7040/ S 180mm (7") / GA9030/ S/ GA9040/ S 230mm (9") 204

-  Double Insulation
-  Soft Start (GA7030S/ GA7040S/ GA9030S/ GA9040S)
-  Torque Limiter



	GA7030/ GA7030S	GA7040/ GA7040S	GA9030/ GA9030S	GA9040/ GA9040S
<b>Continuous rating Input</b>	2,400W	2,600W	2,400W	2,600W
<b>Capacity</b> (Depressed center wheel)	180mm (7")		230mm (9")	
<b>Hole dia.</b>	22.23mm (7/8")		22.23mm (7/8")	
<b>No load speed</b>	8,500rpm		6,600rpm	
<b>Dimensions (L x W x H)</b>	511mm x 200mm x 140mm (20-1/8" x 7-7/8" x 5-1/2")		511mm x 249mm x 140mm (20-1/8" x 9-3/4" x 5-1/2")	
<b>Net weight*</b>	6.0kg (11.2lbs)	6.4kg (14.0lbs)	6.3kg (13.9lbs)	6.6kg (14.6lbs) GA9040 6.7kg (14.8lbs) GA9040S
<b>Power supply cord</b>	2.5m (8.2ft)			

**Standard Equipment:** Lock Nut wrench, Grip (Tool does not come with depressed center wheel)

\*weight according to EPTA-Procedure 01/2003 *Items of standard equipment and specifications may vary by country or area.*

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan


PRINTED IN JAPAN BD-AJ

# The Inside of the Creature Is...

## Outstanding Durability


### /// Superior Anti-Dust Structure

Protective zigzag varnish on armature coil.  
Protective powder varnish-coating on field coil.  
Bearing-protective labyrinth construction.  
Vent slots designed to minimize dust entrance.

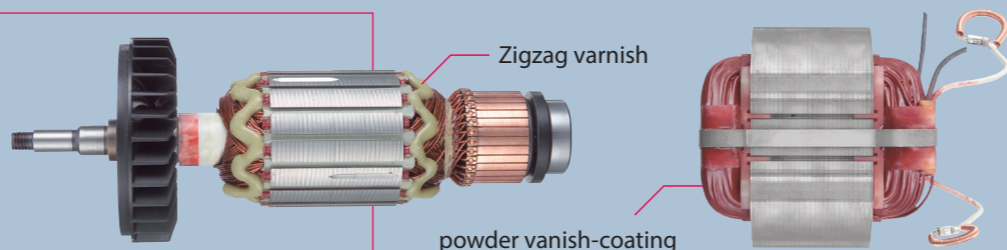

### /// Machined Bevel Gear

having durability higher than sintered gear.




### /// Large Rubber Tool Rest

### /// Increased Heat Resistance

superior to our predecessor models.

### /// Torque Limiter

### /// Large-boned shaft having durability

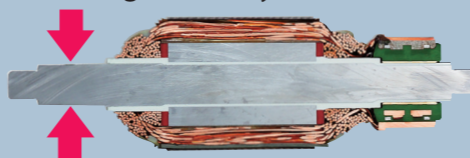

### /// Heavy Duty Motor

180mm (7") GA7030/ S	<b>2,400W</b>	GA7040/ S	<b>2,600W</b>
230mm (9") GA9030/ S	<b>2,400W</b>	GA9040/ S	<b>2,600W</b>

### /// Rotatable Rear Handle

Can be positioned to suit most cutting and grinding operations. (90 degrees R/L)



### /// Low Vibration Rear Handle

with soft grip for more comfort and control.



### /// Vibration Absorbing Side Grip (option)

