

40V<sup>Li-ION</sup> max + 40V<sup>Li-ION</sup> max  
**XGT X2**  
 80V<sup>max</sup>

High Power  
 Durability  
 Digital  
 Communication



**Makita**

Cordless Power Cutter  
 CE002G 355 mm (14") Dry  
 CE001G 355 mm (14") Dry & Wet

Satisfy Professional's Needs

**XGT**

**XGT X2**  
 80V<sup>max</sup>

40V<sup>Li-ION</sup> max + 40V<sup>Li-ION</sup> max



**CE002G**  
 355 mm (14") Dry



**CE001G**  
 355 mm (14") Dry & Wet



**Accessories**

**Diamond wheel for concrete**

Segmented type 355 x 25.4  
 Part No.  
 Dry \*D-56998 (EN)  
 Dry & Wet E-12996 (EN)  
 \*Laser Welding



**Abrasive cut-off wheel for Metal CE001G only**

355 x 4.3 x 25.4 A24T  
 5per set  
 Part No.  
 E-12790-5



**Wireless unit set**

CE002G only  
 Part No.  
 198900-7/ 199393-1 / 198901-5



**Charging Time**

	Fast Charging			
	DC40RA	DC40RB	DC40RC	DC40WA
BL4040 4.0Ah	45 min	67 min	210 min	
*BL4040F 4.0Ah	45 min	67 min	210 min	
*BL4050F 5.0Ah	50 min	85 min	260 min	
*BL4080F 8.0Ah	76 min	170 min	420 min	

\*1 Recommended battery

**Cordless Power Cutter**

**CE002G / CE001G 355 mm (14")**

	CE002G	CE001G
Brake	355 mm (14")	355 mm (14")
Dust Collection (CE002G only)	25.4 mm (1")	25.4 mm (1")
Built-in Job Light	4.0 mm (5/32")	5.0 mm (3/16")
	2.0 mm (5/64")	2.0 mm (5/64")
	127 mm (5")	127 mm (5")
	4,200	5,300
	2.5 / 2.5 m/s <sup>2</sup> or less	2.5 / 2.5 m/s <sup>2</sup> or less
<b>Standard Equipment:</b>		
CE002G: Wrench, Ring set, Hose clamp, Wireless unit (country-specific), Wireless unit adapter (country-specific), Battery, Charger	Concrete cutting, Left / Right: Sound pressure level 106 dB(A) Sound power level 117 dB(A)	109 dB(A) 120 dB(A)
CE001G: Wrench, Coupling sleeve, Ring set, Battery, Charger	Dimensions (L x W x H) w/ BL4040/F, BL4050F: 825 x 272 x 487 mm (32-1/2 x 10-3/4 x 19-1/4")	786 x 272 x 433 mm (31 x 10-3/4 x 17") 825 x 283 x 487 mm (32-1/2 x 11-1/8 x 19-1/4") (31 x 11-1/8 x 17")
	w/ BL4080F: 825 x 283 x 487 mm (32-1/2 x 11-1/8 x 19-1/4")	12.3 - 14.1 kg (27.1 - 31.1 lbs.)
	Net weight 13.1 - 15.1 kg (28.9 - 33.3 lbs.)	

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.

Items of standard equipment and specifications may vary by country or area.

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202306

Max. cutting capacity

**127mm**

**BL MOTOR AFT AWS XPT**  
 CE002G only CE001G only

**40V<sup>Li-ion</sup> max + 40V<sup>Li-ion</sup> max**  
**XGT X2**  
**80V<sup>max</sup>**

# More powerful than engine tools




## Equipped with anti-vibration housing

with built-in spring to absorb the vibration from cutting to integrated front and rear handles.

Low vibration  
 Front handle Rear handle  
**2.0/1.2**  
 m/s  
 Concrete cutting




## BL MOTOR High power Brushless motor



## AFT Active Feedback sensing Technology

shuts down current to the motor, if the rotation speed suddenly slows down (in the case of kick-back, etc.).

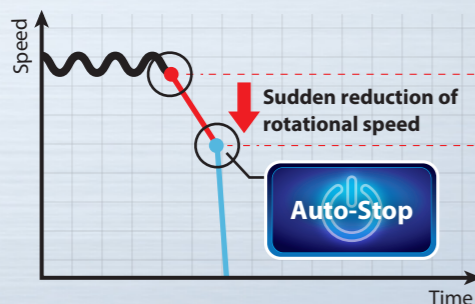

Dust collection rate  
**90%**  
 or more  
 Concrete cutting

Max. cutting capacity  
**127mm**

## Can be used with Vacuum cleaner. CE002G only

Dust collection rate during operation is 90% or more in cutting concrete with vacuum cleaner\*1 connected.  
 • Designed specially for cutting with diamond wheel  
 • Our recommended vacuum cleaners \*1 are those with air flow of 1.8m<sup>3</sup>/min or more.  
 \*1 VC4210M, VC002G series, etc

## AWS Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.

(CE002G only)




**CE002G**  
 355 mm (14")  
 Dry



## (BRAKE) Electric brake

## XPT eXtreme Protection Technology

(CE001G only)  
 Enhanced Dust and Drip-proof Performance ensure reliable operation even under bad weather



**CE001G**  
 355 mm (14")  
 Dry & Wet



Water supply kit can be connected.